

CONSUMER SAFETY INFORMATION

- Read this manual before installing and operating this appliance.
- Failure to follow these instructions may result in electric shock, fire property, or personal injury.
- Do not store or use gasoline or other flammable liquids in the vicinity of this appliance.

HOWARM

ELECTRIC FIREPLACE

/ MODEL: IF-13 SERIES

USER MANUAL



CONTENTS

SAFETY & PRE-INSTALLATION

Important Safety Information!	02
Preparation	03

01

PARTS, DIMENSIONS & INSTALLATION

Parts & Hardware	05
Specification And Dimension	05
Product Dimensions	06
Installation And Assembly	06

02

SAFE OPERATION & MAINTENANCE

Warning	18
Care And Maintenance	20

03

SAFETY & PRE-INSTALLATION

Welcome, and thank you for choosing our product. Before installation, let's walk through the essential safety notes and a few simple preparations. Taking a moment here ensures everything goes smoothly later.

IMPORTANT SAFETY INFORMATION!

01 / WARNING

- Read all instructions before using this heater!
- This heater is hot when in use. To avoid burns, DO NOT let bare skin touch hot surfaces. If provided, use handles when moving this heater. Keep combustible materials, such as furniture, pillows, bedding, papers, clothes, and curtains at least 3 feet (0.9m) from the front of the heater, and keep them away from the sides and rear.
- Extreme caution is necessary when any heater is used by or near children or invalids and whenever the heater is left operating and unattended.
- DO NOT operate any heater with a damaged cord or plug or after the heater malfunctions, has been dropped or damaged in any manner, Discard heater, or return to authorized service facility for examination and /or repair.
- DO NOT run power cord under carpeting. DO NOT cover power cord with throw rugs, runners, or similar coverings. DO NOT route power cord under furniture or appliances. Arrange power cord away from traffic area, and where it will not be tripped over.

02 / WARNING

- Connect to properly grounded outlets ONLY.
- DO NOT insert or allow foreign objects to enter any ventilation or exhaust openings, as this may cause electric shock or fire, or damage the heater.
- To prevent a possible fire, DO NOT block air intakes or exhaust in any manner. Doing so could cause a fire. DO NOT use on soft surfaces, like a bed, where openings may become blocked.
- A heater has hot and arcing or sparking parts inside. DO NOT use it in areas where gasoline, paint, or flammable liquids are used or stored.
- Use this heater only as described in this manual. Any other use not recommended by the manufacturer may cause fire, electric shock, or injury to persons.
- ALWAYS plug heaters directly into a wall outlet/receptacle. Never use with an extension cord or relocatable power tap (outlet/power strip).
- DO NOT place the heater near a bed because objects such as pillows or blankets can fall off the bed and be ignited by the heater.
- NEVER use this heater in bathrooms, laundry rooms, or any other location where the heater could fall into a bathtub or pool, become damp or come in contact with water.

- **AVOID FIRE!** Regularly inspect all air vents to make sure they are free from dust, lint, or other blockage. Unplug the unit and clean with a vacuum **ONLY**. **DO NOT** rinse or get wet.
- **ALWAYS** mount to wall bracket before use. **DO NOT** set on the floor, or other surface, to use.
- **NEVER** use a wall mount bracket from another manufacturer.
- This product is not intended to be a primary heat source. It is for supplemental heat only.
- **INDOOR** use only! **NEVER** use this heater outdoors! Doing so may result in electric shock!
- Risk of electric shock! **DO NOT OPEN!** No user-serviceable parts inside!
- **ALWAYS** turn this heater off before unplugging it from the outlet.
- **ALWAYS** disconnect this unit from the power supply before performing any assembly or cleaning, or before relocating the electric fireplace.
- **NEVER** leave this heater unattended. **ALWAYS** unplug this heater when not in use.
- **ALWAYS** store this heater in a dry location. **NEVER** use the fireplace if it has become wet.
- **NEVER** plug this heater into an outlet that is old, cracked, or has any loose wires or connections. Plugging this heater into a faulty outlet could result in electric arcing within the outlet that could cause the outlet to overheat or catch fire.
- **ALWAYS** check your heater cord and plug connections with each use!
 - i) **MAKE SURE** the plug fits tight in the outlet! Faulty wall outlet connections or loose plugs can cause the outlet to overheat.
 - ii) Heaters draw more current than small appliances. Overheating may occur even if it has not occurred with the use of other appliances.
 - iii) During use check frequently to see if the plug outlet or face plate is **HOT!**
 - iv) If the outlet or face plate is **HOT**, discontinue use immediately and have a qualified electrician inspect and/or replace the faulty outlets.

PREPARATION


This product includes a GLASS panel! Always use extreme caution when handling glass. Failure to do so could result in personal injury or property damage.

Remove all parts and hardware from the carton and place them on a clean, soft, dry surface. Parts and assembly steps are grounded for wall-hanging or recessing use. Check the parts list to make sure nothing is missing. Dispose of packaging materials properly. Please recycle whenever possible. You will need the following tools (not included): Phillips screwdriver; stud finder; level; tape measure; electric drill; 1/4" wood drill bit, hammer.


PARTS, DIMENSIONS & INSTALLATION

Now that you've reviewed the safety guidance and prepared the workspace, you're ready to move on. The next section introduces all included parts, product dimensions, and the step-by-step installation process. Follow along at your own pace for a smooth setup.

PARTS & HARDWARE

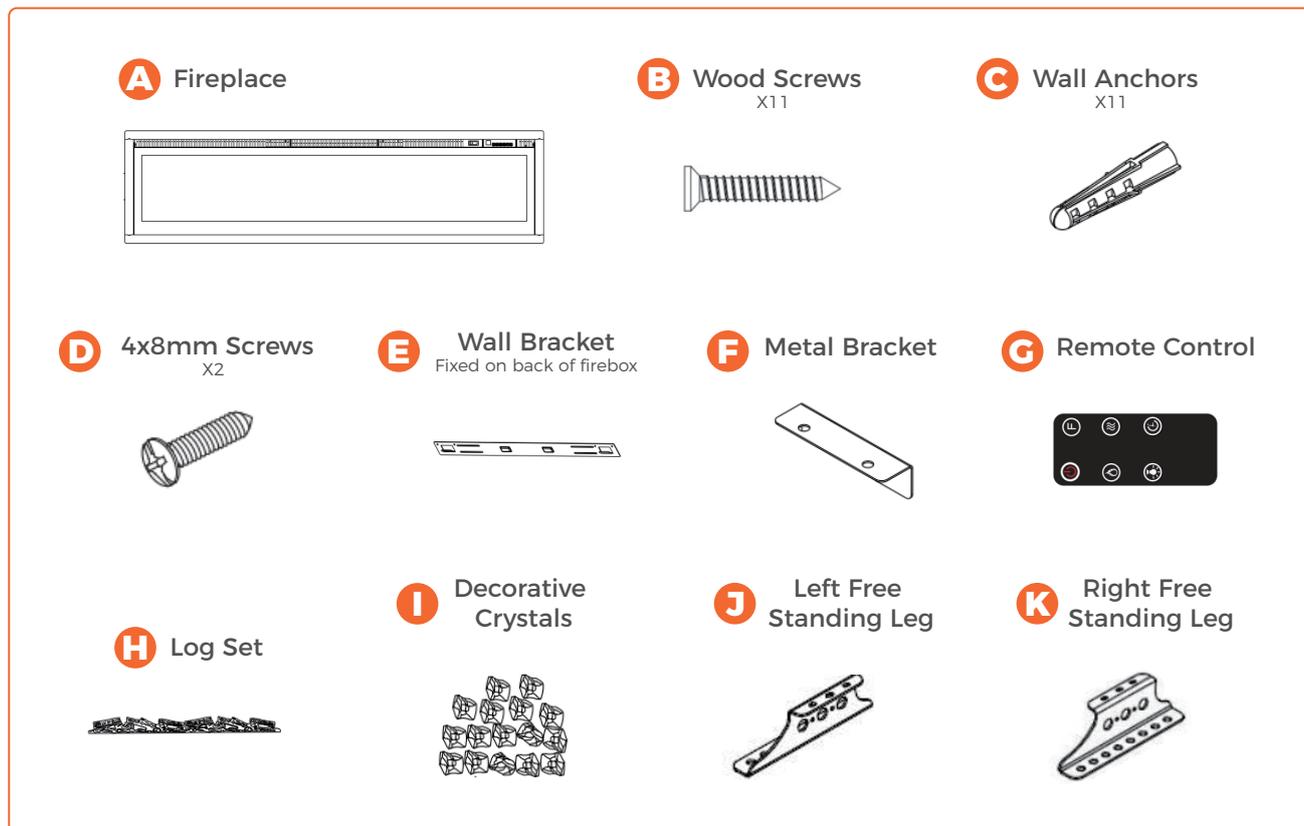

SPECIFICATION AND DIMENSION

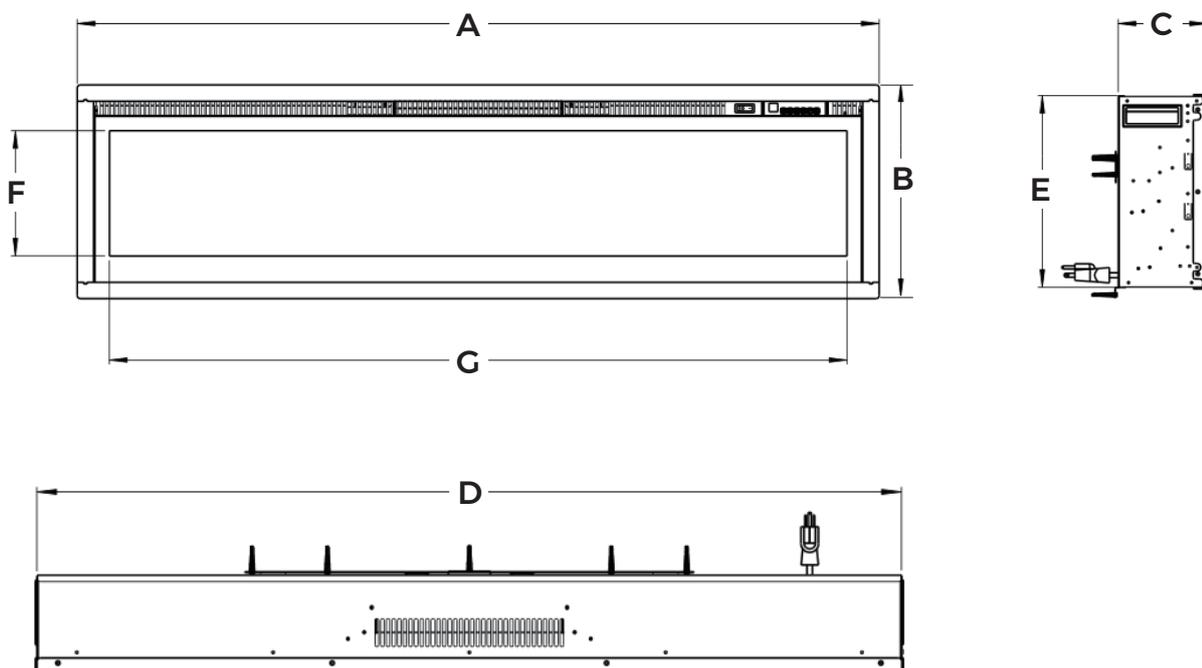

PRODUCT DIMENSIONS

MODEL NUMBER	A	B	C	D	E	F	G
IF-42T	42" 106.7cm	17.7" 45.0cm	5.6" 14.2cm	40.7" 103.5cm	16.3" 41.5cm	12.2" 30.9cm	38.0" 96.5cm
IF-50T	50" 127.0cm	17.7" 45.0cm	5.6" 14.2cm	48.7" 123.8cm	16.3" 41.5cm	12.2" 30.9cm	46.0" 116.8cm
IF-60T	60" 152.4cm	17.7" 45.0cm	5.6" 14.2cm	58.7" 149.2cm	16.3" 41.5cm	12.2" 30.9cm	56.0" 142.2cm
IF-72T	73.2" 186.0cm	17.7" 45.0cm	5.6" 14.2cm	71.9" 182.8cm	16.3" 41.5cm	12.2" 30.9cm	69.0" 175.8cm

INSTALLATION AND ASSEMBLY


Your appliance is a wall-mounted, recessed and/ or mantel installed appliance. Select a suitable location that is not susceptible to moisture and is away from drapes, furniture and high traffic areas.

NOTE: Follow all national and local electrical codes.

MINIMUM CLEARANCE TO COMBUSTIBLES

MEASUREMENTS ARE TAKEN FROM THE GLASS FRONT.			
Bottom	0"	Top	11.8" (300mm) to mantel
Sides	0"	Top	11.8" (300mm) to ceiling
Back	0"		

MINIMUM MANTEL CLEARANCES

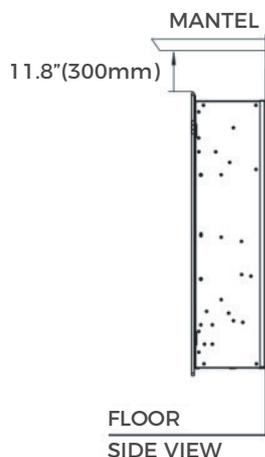

WARNING: When using paint or lacquer to finish the mantel, the paint or lacquer must be heat resistant to prevent discoloration.

01 / RECESSED TO WALL INSTALLATION

(Tips:Wall bracket removing is NOT required.)

- 1 Select a dry wall to open a hole for fireplace box. Figure (A)


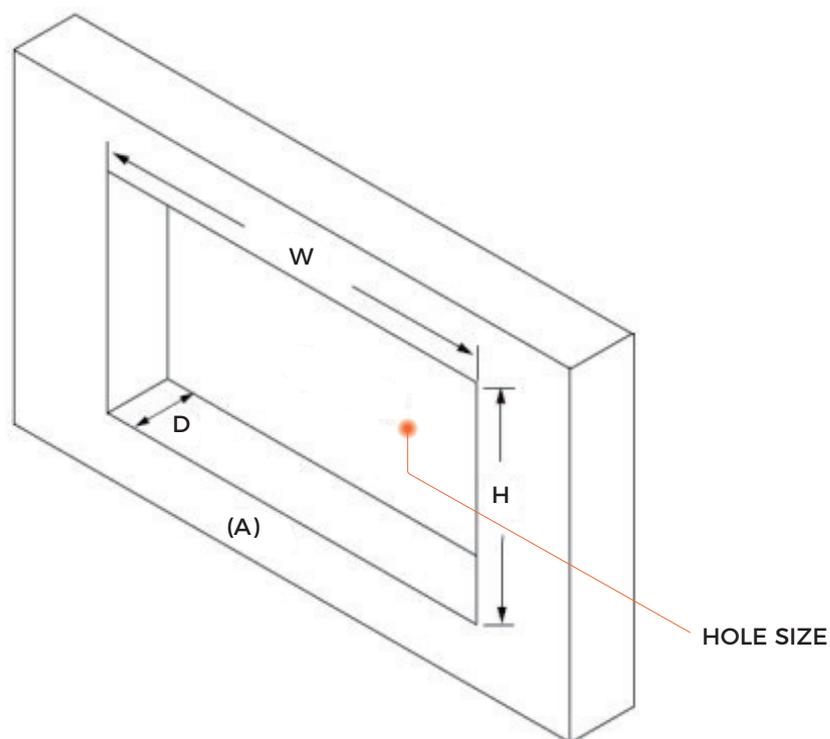


Figure (A) Hole cut size


Size of hole as below chat-Framing hole size

FRAMING HOLE SIZE			
MODEL NUMBER	W	H	D
IF-42T	41"(104.3cm)	17"(43.2cm)	6"(15.2cm)
IF-50T	49"(124.6cm)	17"(43.2cm)	6"(15.2cm)
IF-60T	59"(150.0cm)	17"(43.2cm)	6"(15.2cm)
IF-72T	72.3"(183.6cm)	17"(43.2cm)	6"(15.2cm)

- 2** Remove two screws on both sides of the fireplace at front corner. Figure (C)

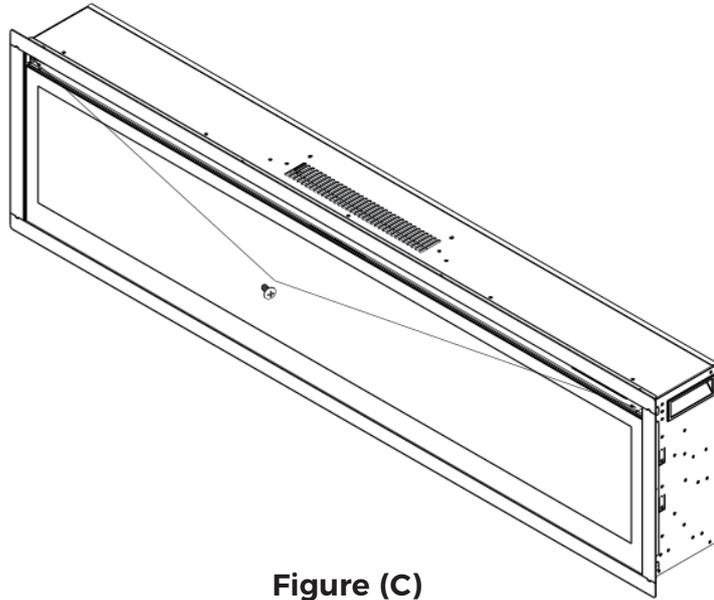

- 3** Take off the front tempered glass of the fireplace. Figure (D)

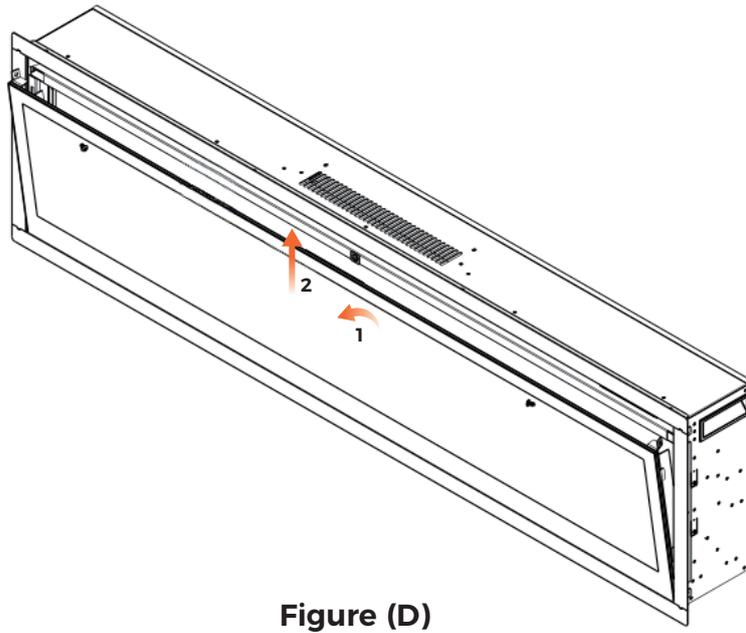

- 4** Take foam out of the fireplace. Figure (E)

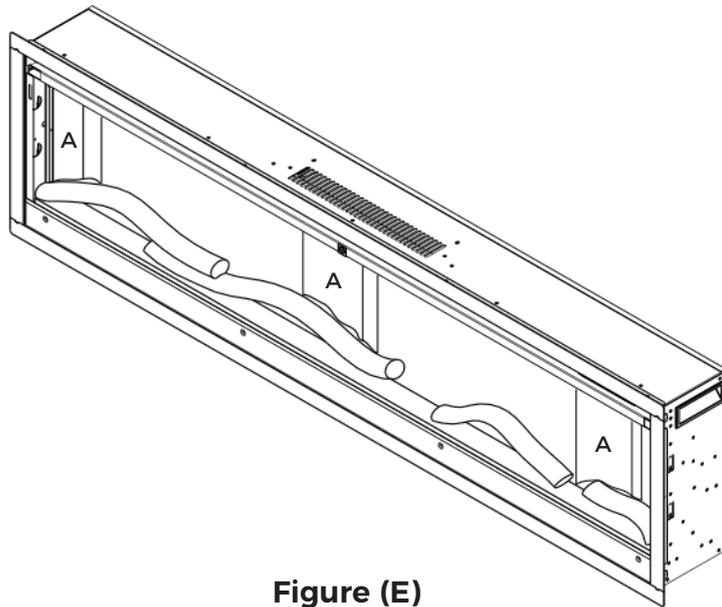


Figure (E)

-
- 5** Have two people to move the fireplace box to the wall hole or fireplace mantel. Figure (F) If the appliance is fully recessed into the wall:


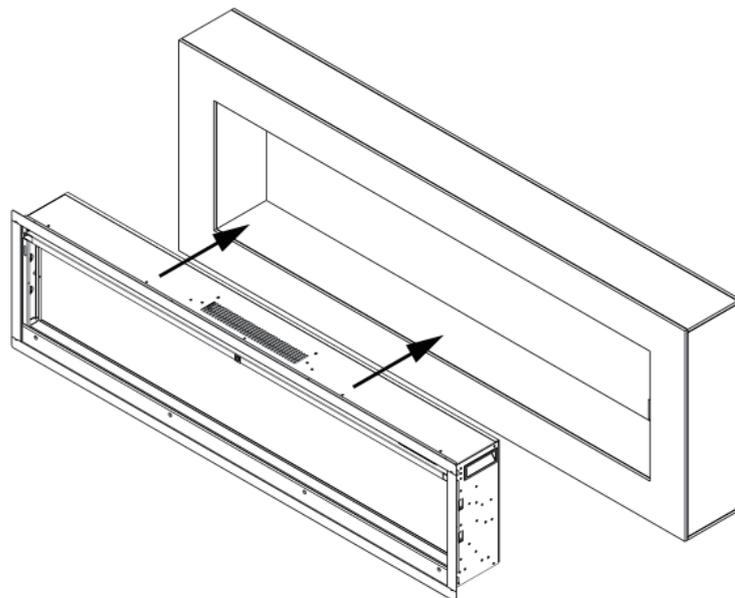


Figure (F)

- Use the 4 screws(provided) to lock the appliance into wall with the existing two side flanges, Figure(G)

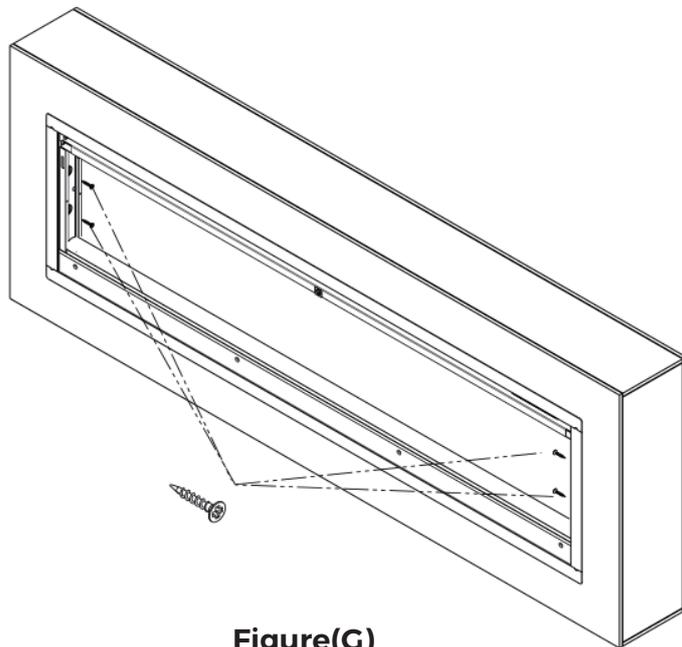

Figure(G)

-
- 6** Put carbon log or crystal stone to bed. Figure (H)

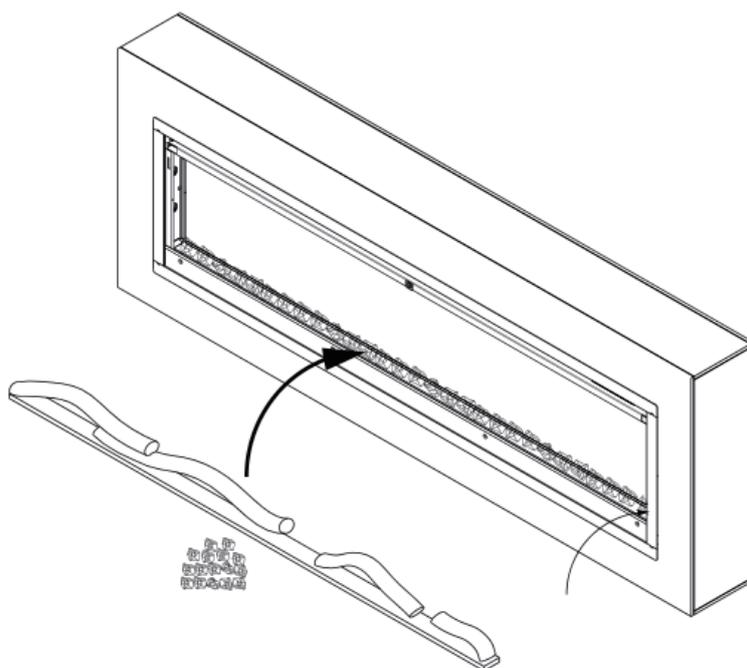


Figure (H)

- 7** Place the front panel lock the appliance. Figure (I)

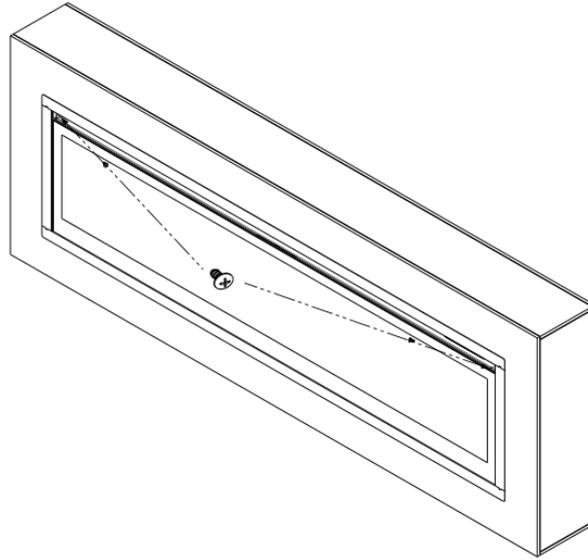



Figure (I)

02 / WALL MOUNTED INSTALLATION


Due to many different materials used on different walls, it is highly recommended that you consult your local builder before you install this appliance on the wall.

- 1** Select a location that is not prone to moisture and is located at least 36"(914mm) away from combustible materials such as curtain drapes, furniture, bedding, paper, etc.
- 2** Have two people hold the appliance against the wall to determine the final location.

- 3** Place unit face down on a soft, non abrasive surface. Remove the bracket from the back of the unit by removing the screws. Figure(a) Remove four pieces of silver screws on both sides. Figure(b)

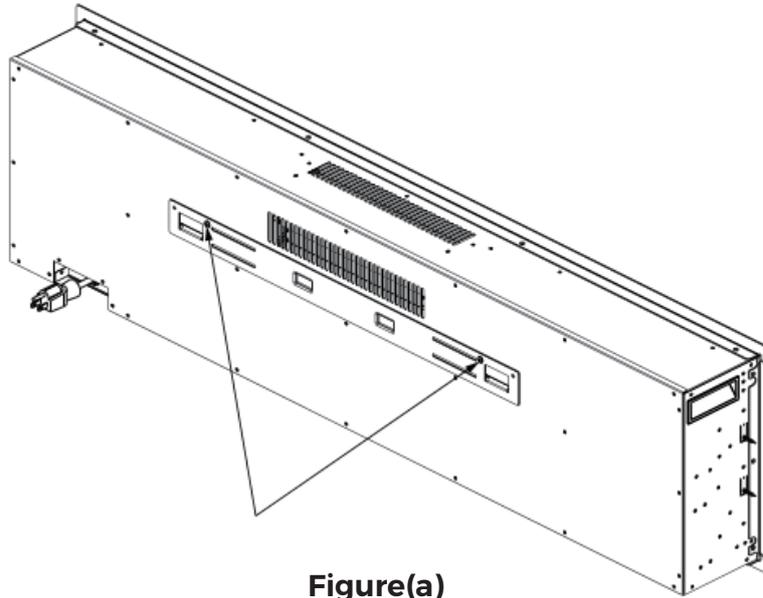

Figure(a)

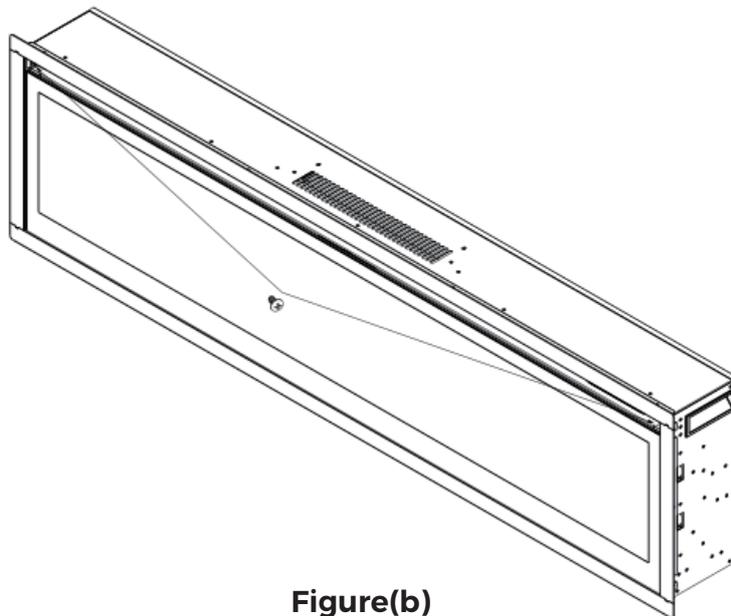

Figure(b)

- 4** Take the glass panel out of the fireplace box. Place it in a soft and clean place. Figure (c)


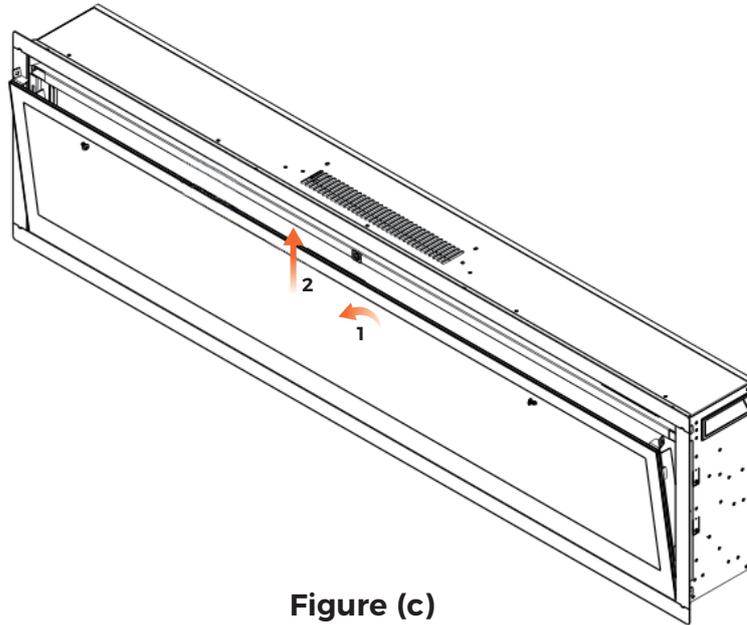



Figure (c)

-
- 5** Take foam(A) out of the fireplace. Figure (d)

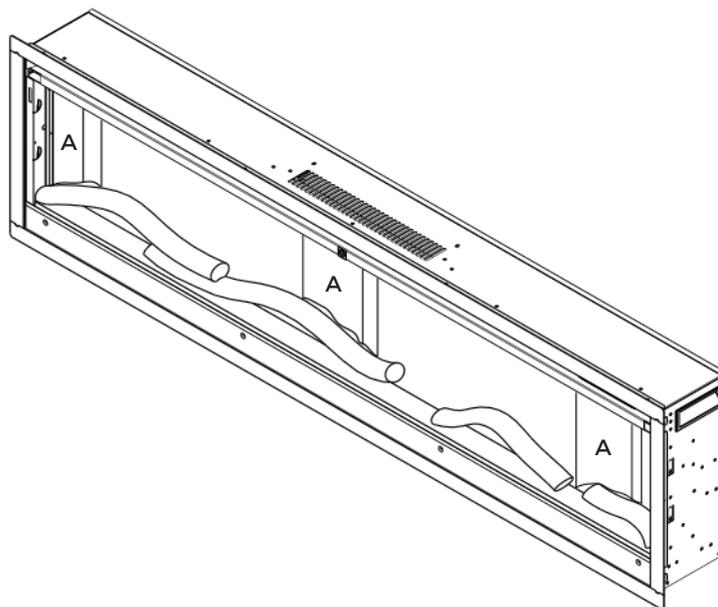


Figure(d)

- 6** Mark out location, then mount the bracket (part e) onto the wall using the supplied screws. This bracket **MUST** have the hooks facing upward and be level. Figure (e)

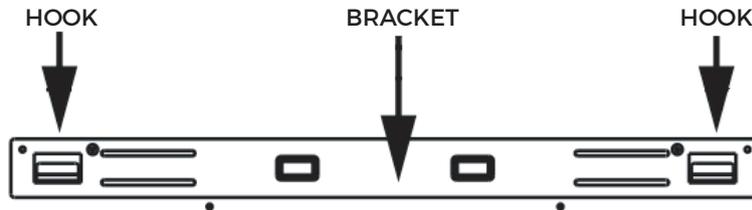


Figure(e)

NOTE: It is strongly recommended that the mounting bracket(part e) be screwed into the wall studs where possible. If the wall studs cannot be used, ensure that the supplied plastic anchors are used to affix the bracket to the wall and the bracket is adequately secured. Figure (f)

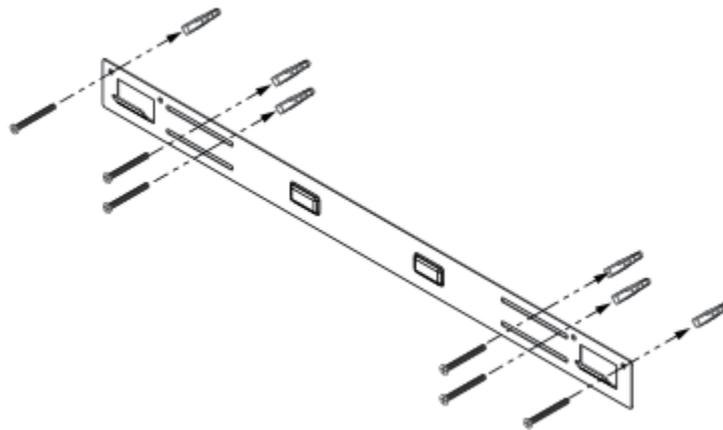


Figure(f)

Fasten the metal bracket (F) at the back of fireplace with 2pcs of 4x8mm screws (D), the other end to the wall with 1pc of drywall anchors.

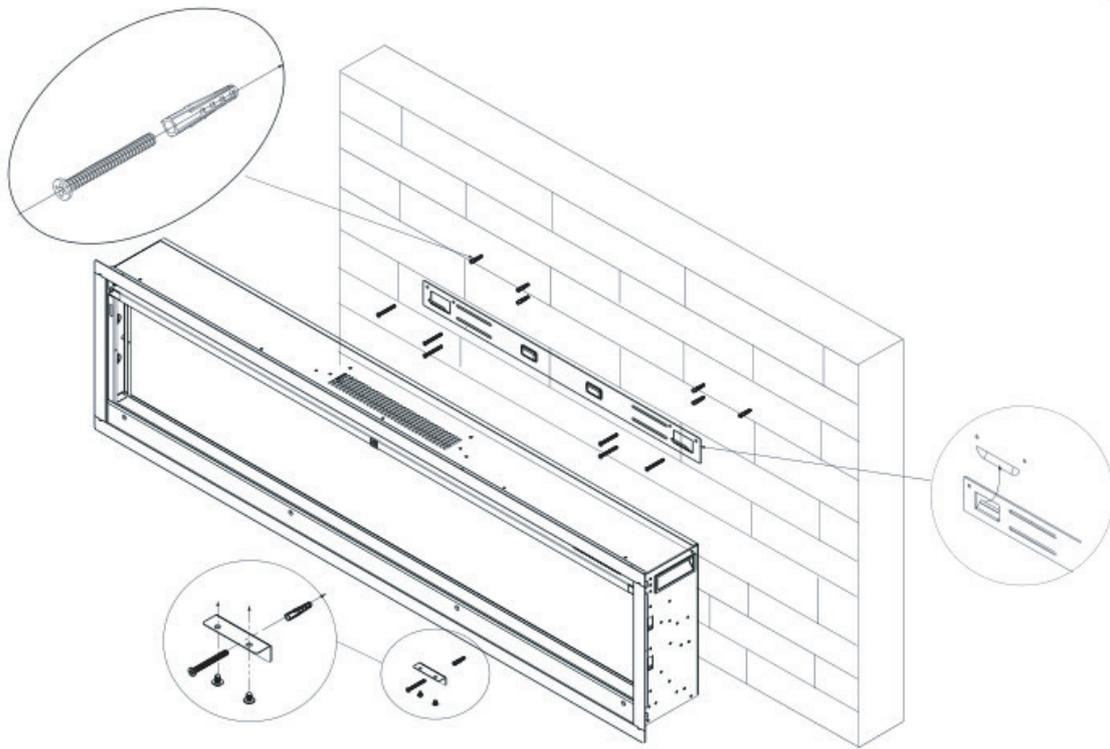


-
- 7** With the wall mounting bracket installed have two people lift the appliance up and insert the two hooks on the bracket into the two slots on the back of the appliance.
 - 8** Put carbon log or crystal stone to bed, place the front panel lock the appliance by 4x8mm screws.

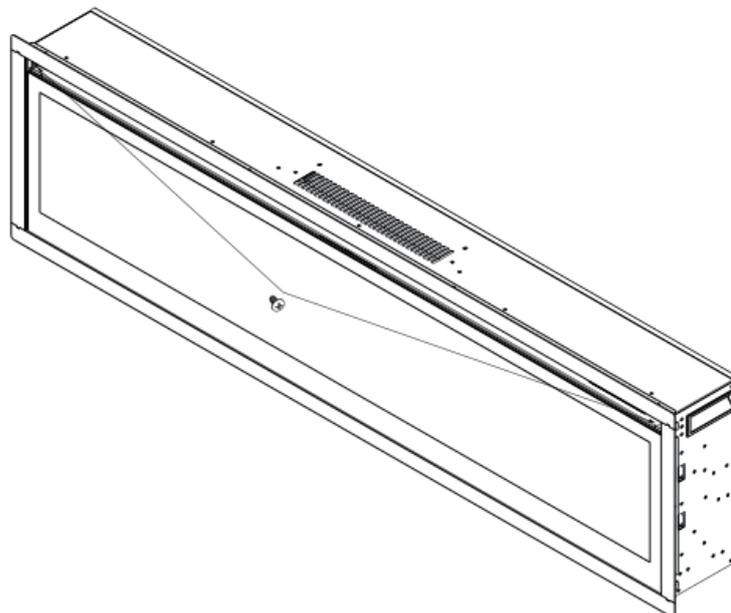

03 / FREE STANDING OPTION

- Lay the heater on the floor or a table
- Install the base with 6pcs screws (screws is on the bottom of the fireplace) as provided

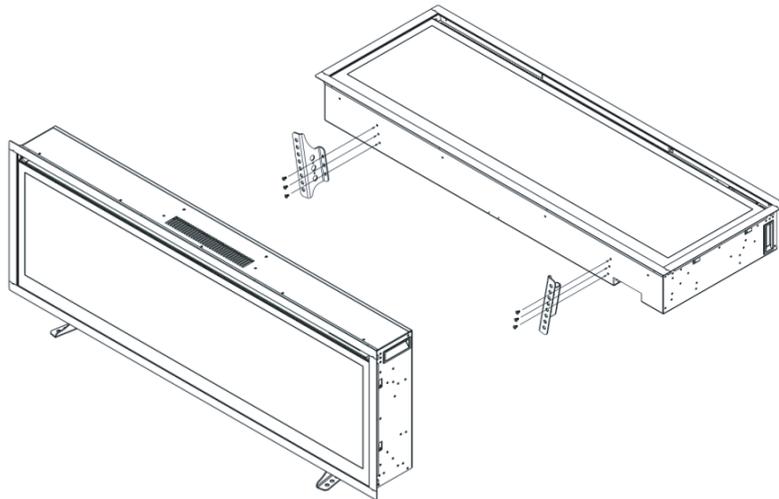

04 / LOG-SET/ CRYSTAL EMBER INSTALLATION

(Note: Please make the installation according to the embers which you bought or selected.)

- Glass front must be removed and the appliance must be mounted in its final location before the log-set/crystal embers are installed.
- If your fireplace come with log-set, remove the log-set from the package, put it to the fireplace designed place. Figure 1
- If your fireplace come with CLEAN CRYSTAL MEDIA: crystal may have a fine oil residue that needs to be cleaned prior to installation. Clean them with mild dish soap, drain, rinse thoroughly and dry before placing into the tray.
- Then place the crystal embers carefully into the bottom tray on the front of the appliance as illustrated. Apply an even layer from side to side. Figure 1

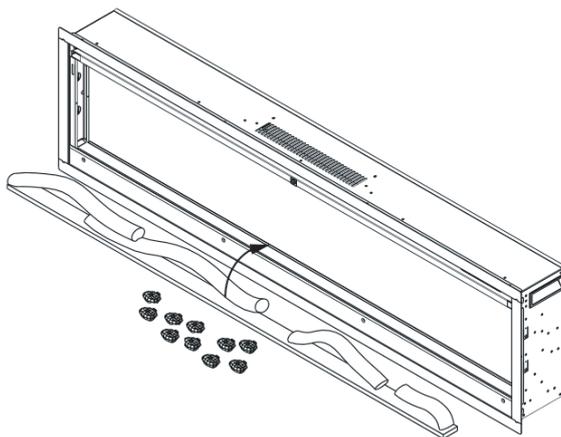


Figure 1

SAFE OPERATION & MAINTENANCE

Great progress—your installation is complete or nearly there. The next section will show you how to operate the product safely and make the most of its features. You'll also find cleaning and maintenance tips to keep it performing reliably.

WARNING


Read and understand this entire owner's manual, including all safety information, before plugging in or using this product. Failure to do so could result in electric shock, fire, serious injury, or death.

01 / POWER

- Make sure the ON/ OFF switch, located on the control panel, is in the OFF position. Plug the power cord into a 220-240V Volt 7 Amp grounded outlet (see IMPORTANT SAFETY INFORMATION on Pages 2 and 3) . Make sure the outlet is in good condition and that the plug is not loose. NEVER exceed the maximum amperage for the circuit. DO NOT plug other appliances into the same circuit.

02 / METHODS OF OPERATION

- This electric fireplace can be operated by the button, located on the TOP right side glass panel of the fireplace, or by the battery-powered REMOTE CONTROL.
- The operation and functions of the two methods are the same.
- Before operating, please review the IMPORTANT SAFETY INFORMATION on Pages 2 and 3, and heed all warnings.

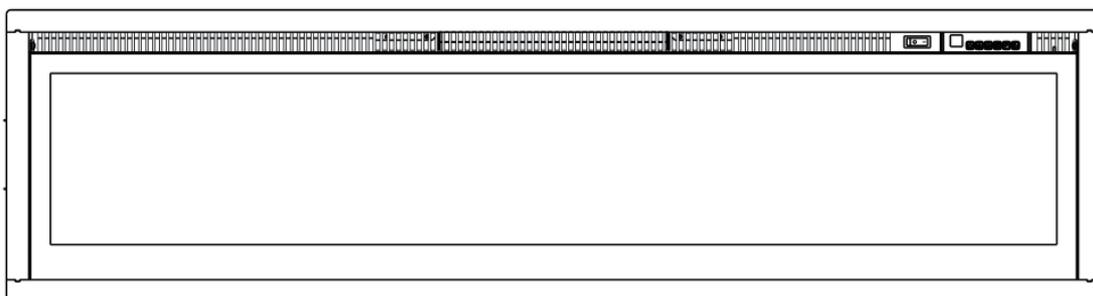



TURN ON SWITCH BUTTON FIRST

BUTTON	FUNCTION	ACTION&INDICATION
 POWER	ON: Enables control panel functions and remote control. Turn on flame effect. OFF: Disables control panel functions and remote control. Turn off flame effect.	1. Press once. Indicator light turns on. Power turns on. All functions enabled. 2. Press again. Indicator light turns off. Power turns on. All functions will off.
 COLOR	COLOR button: Makes the color flame effect changing.	1. Press once. Flame color effect gets changing. 2. Press again until desired setting is reached.
 FLAME	FLAME button: Makes flame effect dimmer and brighter. NOTE: Flame effect stays on until power button is turned off. Flame effect must be on for heater to turn on.	1. Press once. Flame brightness effect gets changing. 2. Press again. Until desired setting is reached.
 HEATER	HEATER button: Turn heater on and off. NOTE: To prevent overheating, the heater fan will blow out cool air for 30 seconds after the heater turn off.	1. Press once. Indicator lights up. 900W heater turns on and blows warm air. 2. Press again. Indicator lights up. 1800W heaters turns on and blows hot air. 3. Press again. Heaters turn off. The display show "00". The fan blows cool air for 30 seconds to allow heater to cool down, then turns off.
 TEMP.	TEMPERATURE button: Control temperature settings to choose temperature as desired. Setting range from 62F to 82F.	1. Press once. Indicator light turn on. Temperature is set to 62F. 2. Press again until desired setting is reached. LED display show setting.
 TIMER	TIMER button: Control timer settings to turn off fireplace at selected time. Settings range from 0 hours, 1hours, to 8 hours.	1. Press once. Indicator light turn on. Temperature is set to hours. 2. Press again until desired setting is reached. LED display show setting.

NOTICE 1

When the heater is first turned on, a slight odor may be present.

NOTICE 2

To improve operation, aim the remote control at the front of the fireplace. DO NOT press the buttons too quickly. Give the unit time to respond to each command.

03 / TEMPERATURE LIMITING CONTROL

This heater is equipped with a Temperature Limiting Control. Should the heater reach an unsafe temperature, the heater will automatically turn OFF. To reset:

1. Unplug the power cord from the outlet.
2. Turn the ON/OFF switch on the CONTROL PANEL to OFF. Wait 5 minutes.
3. Inspect the fireplace to make sure no vents are blocked, or clogged with dust or lint. If there are, use a vacuum to clean the vent areas.
4. With the POWER switch in the OFF position, plug the power cord back into the outlet.
5. If the problem continues, have your outlet and wiring inspected by a professional.

04 / REMOTE CONTROL BATTERY INFORMATION

- With 2x AAA batteries.

NOTE: Remote control battery used depends on the remote control type which selected above.

NEVER dispose of batteries in fire. Failure to observe this precaution may result in an explosion.

Dispose of batteries at your local hazardous material processing center.

CARE AND MAINTENANCE

01 / CLEANING

ALWAYS turn the heater OFF and unplug the power cord from the outlet before cleaning, performing maintenance, or moving this fireplace. Failure to do so could result in electric shock, fire, or personal injury.

NEVER immerse in water or spray with water. Doing so could result in electric shock, fire, or personal injury.

METAL:

- Buff using a soft cloth, slightly dampened with a citrus oil-based product.
- **DO NOT** use brass polish or household cleaners as these products will damage the metal trim.

GLASS:

- Use a good quality glass cleaner and dry thoroughly with a paper towel or lint-free cloth.

- NEVER use abrasive cleansers, liquid sprays, or any cleaner that could scratch the surface.

VENTS:

- Use a vacuum or duster to remove dust and dirt from the heater and vent areas.
- Clean the exterior of the fireplace with a slightly damp cloth or duster.

02 / MAINTENANCE

Risk of electric shock! DO NOT OPEN! No user-serviceable parts inside!

ALWAYS turn the heater OFF and unplug the power cord from the outlet before cleaning, performing maintenance, or moving this fireplace. Failure to do so could result in electric shock, fire, or personal injury.

ELECTRICAL AND MOVING PARTS:

- The fan motors are lubricated at the factory and will not require lubrication.
- Electrical components are integrated in the fireplace and are not serviceable by the consumer.

STORAGE:

- Store heater in a clean dry place when not in use.

WARNING! No other servicing should be performed by the consumer. Do not attempt to service the unit yourself.

03 / TROUBLESHOOTING

WARNING! Disconnect the appliance completely and let cool prior to any service. Only a qualified service person should service and repair this electric appliance.

PROBLEM	POSSIBLE CAUSE	SOLUTION
Fireplace turns off and will not turn on.	1. Fireplace has overheated and safety device has caused thermal switch to disconnect or home circuit breaker has opened.	1. Reset switch by turning main power off and waiting turning it back on or breaker circuit breaker.
Flame is not moving.	1. Loose wiring. 2. Flame motor defective. 3. Flame rod out of place	1. Inspect wiring for loose connections. 2. Call a qualified service technician to replace flame motor. 3. "Flame Rod" out of place due to rough transit/ handing of the product. This issue can be corrected as simple as removing the glass, flipping the fireplace upside and down, removing a set of screws that are holding the bottom frame plate and placing the flame rod back into place.
Flame is not visible.	1. Wiring is loose.	1. Disconnect from power source and inspect wiring for loose connections and repair or replace if necessary. 2. Push the flame button to high.
Log set and /or is not glowing.	1. Wiring is loose. 2. Ember is off mode.	1. Disconnect from power source and inspect wiring for loose connections and repair or replace if necessary.
Remote control does not work.	1. Low batteries. 2. Not aiming control correctly. 3. Defective remote control and/ or sensor.	1. Replace batteries in remote control. 2. Aim control at sensor located directly behind glass screen in center of unit just above logs. 3. Replace remote control and/ or sensor.

HOWARM

You've reached the end of the guide. With proper use and regular care, the product will continue to deliver reliable performance and comfort for years to come. If you ever need assistance, our support team is always ready.
